

Sistem vatrootpornosti

(prolazi kroz zidove/plafone - materijali ispitani)



Armaprotect S

- Fleksibilna protivpožarna zaštitna traka ekspandira u slučaju zagrevanja
- Na bazi epoksidne smole sa ekspandirajućim sastojcima koji reaguju na povišenu temperaturu.
- Boja: Crna
- Debljina: 2,5 mm; Dužina: 2000 mm; Širina 30 ili 50 mm
- Ne sadrži halogene i teške metale. Vodootporan



Mogućnost 2 - Armaprotect S + malter (1)

- SH/Armaflex:

Stahl, Edelstahl, Guss

Application C: 9x64 bis 9x89 (10/30)

Application B: 24x45 bis 48x89 (10/30)

Application A: 36x35 bis 46x48 (10/30)

Kupfer

Application C: 9x35 bis 9x54 (10/50)

Application B: 20x35 bis 30x54 (10/50)

30x57 bis 48x89 (15/50)

Application A: 36x28 bis 46x42 (10/30)

- NH/Armaflex

19x10 bis 19x60 (10/50)



Armaprotect F

- Ekspandirajući silikon u slučaju povišenja temp.
- Boja: Bela
- Sadržaj: 310 cm³ / 410 g
- Bez halogena, azbesta i organskih rastvarača.



Mogućnost 3 - Armaprotect F + MW + malter (2)

- SH/Armaflex:

Stahl, Edelstahl, Guss

Application C: 9x10 bis 9x76 (10/30)

9x89 bis 9x114 (20/30)

Application B: 13x10 bis 30x60 (10/30)

40x76 (20/30)


Application A: 24x10 bis 24x28 (10/30)

Kupfer

Application C: 9x10 bis 9x22 (10/30)

Application B: 13x10 bis 13x22 (10/30)

Application A: 24x10 bis 24x22 (10/30)

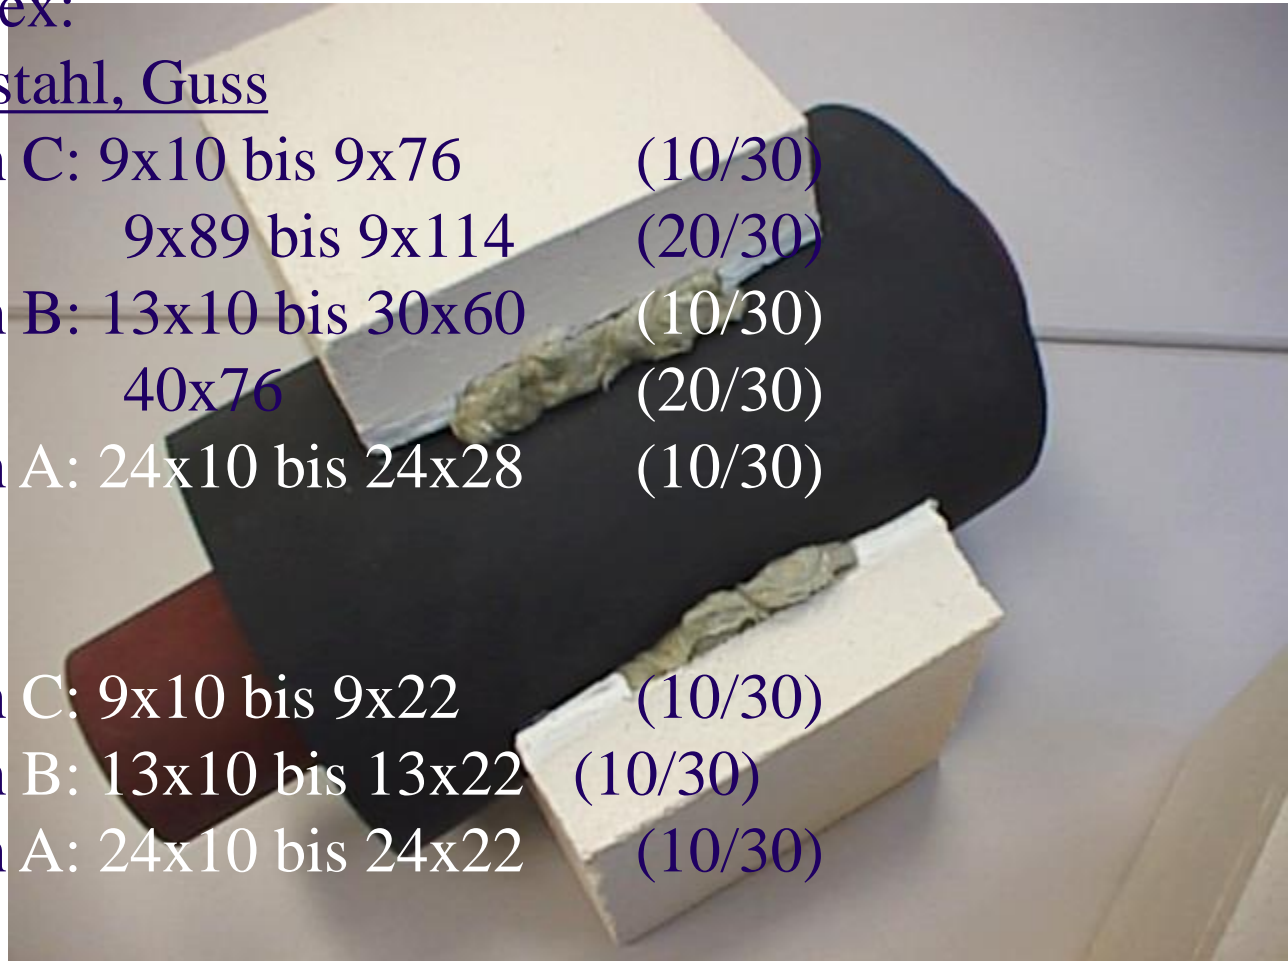

- **General Building inspection „Zulassung“**

Armaprotect S: Z-19.11-1358 (DIN 4102-B2)

Armaprotect F: Z-19.11-1355 (DIN 4102-B2)

- **General Building inspection Certificate**

R 90: P-3849/5370 MPA BS

